




LASER ENGRAVERS



FIBERLUX NANO

A quality entry level engraver for cutting and engraving all precious metals! Its compact design makes it the ideal solution for small to medium operations. It's working area can be made completely accessible thanks to the removable protective cover.

Available in 30W.



FIBERLUX EL

Derived from the PRO series, the EL line incorporates all the advanced features of the FiberLUX, including the closing chamber, motorized Z-axis and the capability to install the drag and clamp system for multiple cutting jobs. The machine and the software are simple and easy for any user.

Available in 50W



FIBERLUX 3D

Engrave tilted, convex and spherical objects with ease using the FiberLux 3D. The intuitive supplied software allows for precise and efficient setup and production. The FiberLux 3D can be used to mark any metal object, engrave photos, logos, trademarks and text with surface unevenness up to 35 mm.

Available in 70W & 100W.



FIBERLUX PRO

Equipped with Ytterbium-doped fiber optics, a low environmental impact and minimal maintenance, up to 50,000 hours of operation, the FiberLux PRO is the ideal laser for cutting and marking. The PRO can be used to mark objects of any metal and is ideal for engraving photographs, logos, trademarks and texts.

Available in 70W. 100W & 200W

APPLICATIONS


- Engrave on rings, bracelets, medallions, flat and slightly curved surfaces
- Excavation by layers and 3D bas-reliefs
- Engrave photographs, names, designs and logos, including trademarks
- Engrave on watch faces and eyewear
- Automatic mode for mass production
- 3D Curved Surfaces (Optional)

FEATURES

- Pulsed Fiber Laser
- D.S.P. Technology
- Red double pointer for positioning
- Z-axis with software-controlled stepper motor
- High frequency 1Mhz scanner head,
- 3D Software for Image Processing allows 3D focus-shift scan-head functions (Optional)



ENGRAVER SAMPLES



FIBERLUX PRO



FIBERLUX EL




FIBERLUX 3D



FIBERLUX NANO

LASER ENGRAVER OPTIONS

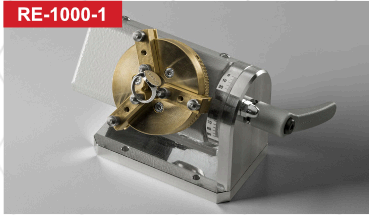

RE-1000-1
R-AXIS ROTATION SYSTEM
Allows for external and internal marking for rings and bracelets.




RE-1000-10
R-AXIS ROTATION SYSTEM WITH MAGNETIC CLAMP
Allows for external and internal marking for rings and bracelets.




RE-1000-7
HEAVY-DUTY VARIABLE SPEED DUST ASPIRATOR
Designed to recover 99.9% of precious metals used during operation.



RE-1000-15
STANDARD VARIABLE SPEED DUST ASPIRATOR
For efficient recovery with built-in HEPA filtration

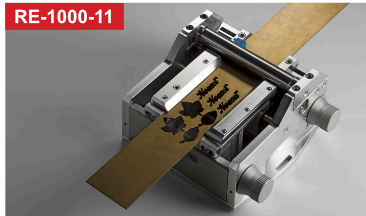

RE-1000-11
DRAG AND CLAMP SYSTEM
Designed for automatic feeding of materials during cutting process.

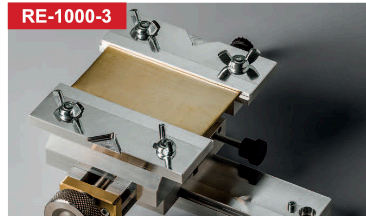

RE-1000-3
X-Y AXIS CLAMP
For simpler manual positioning of metals.



RE-1000-6
INTERNAL CAMERA
Allows for easier object positioning.

SPECIFICATIONS

	FIBERLUX NANO	FIBERLUX EL	FIBERLUX 3D	FIBERLUX PRO			
SKU	RE-3000	RE-1050	RE-5070	RE-50100	RE-4070	RE-4100	RE-4200
Engraver Software	Standard Software		SCAPS (Scanner Application)				
Output Power	30W	50W	70W	100W	70W	100W	200W
Absorbed Power	350W		600W	650W	450W		900W
Working Area	250 250 x 310mm	250 x 250 x 350mm	230 x 380 x 350mm		250 x 250 x 350mm		
Focal 100 Marking	60 x 60 mm / 11 um		60 x 60mm / 11 um				
Focal 160 Marking	110 x 110mm / 26um						
Focal 210 Marking	- - -				160 x 160mm / 34um		
Galvo Head Speed	5000mm/s	7000mm/s	6000mm/s		Adjustable up to 7000mm/s		
Max Pulse Energy And Energy Duration	10 to 200ms up to 1.5MJ						
Max Frequency	60kHz	100kHz	1000kHz				

CUTTING SPEED TIME CHART

GOLD PLATE SHAPE	Circle Shape 15mm (OD)		Name Plate 50mm (L) x 10mm (W)	
GOLD PLATE THICKNESS	0.5mm	1mm	0.5mm	1mm

Machine	Power	Time			
FIBERLUX NANO	30W	37s	140s	215s	1021s
FIBERLUX EL	50W	20s	40s	150s	331s
FIBERLUX PRO	50w	18s	54s	153s	324s
	70W	12s	35s	102s	235s
	100W	5s	15s	50s	145s